



You Know Your Building. We Know Air Quality.

Air Purification for
Commercial Buildings



Proven Technology. Real-World Data. Hassle-Free Operation.

We bring 30 years of experience keeping people safe in the most dangerous air environments. Unlike consumer products, our solutions exceed stringent industrial specifications, but are thoughtfully designed to integrate quietly into the commercial building environment. The Omni CleanAir Professional Series removes airborne particles that cause harm.

KEY FEATURES



- Quietest performance per CFM on the market.
- Industrial specification consistently delivers 6 or more air changes per hour (ACH).
- MERV-11 Prefilter removes larger airborne particles such as pollen, dust, and tobacco smoke. Extends the life of the high efficiency filter.
- Carbon Media Filter: Removes Chemicals, Gases, VOCs and Odors.
- SureUVCTM Sealed chamber. Continuous high intensity germicidal irradiation of pathogens. Also disinfects the HEPA filter for safe replacement.
- True HEPA captures sub-micron particles at 99.99% efficiency.
- Portable in room solution to supplement high risk, poorly ventilated indoor spaces.
- Negative pressure capable for more stringent isolation applications.




How Our Portable Air Purification System Works

Combines portability with 3 proven technologies to eradicate pathogens and pollutants

VENTILATE

High Capacity Air Flow

Powerful with 250 – 1200 CFM
Runs 1000s of hours continuously
Up to 12,000 ft³ of space



ELIMINATE

Remove Airborne Aerosols...Fast

360 Degree Air Intake
Merv-11 Prefilter. Activated Carbon Filter.
99.99% IEST Tested True HEPA



6 ACH

12,000 ft³



INACTIVATE

Proven to Kill Pathogens

High Intensity UVC – 64W @ 254nm
SureUVC™ – 100% Sealed & Safe. Always On.
Close Contact Irradiation: Viruses / Bacteria



Key Features

PROFESSIONAL DESIGN

Easy to clean, non-toxic, powder-coated protective finish with small footprint.

JUST HEPA. NO HYPE.


This twelve inch True HEPA filter removes 99.99% of ultrafine air particles.

POWERFUL FAN

Pulling pre-filtered air from below and pushing air up.

360° AIR INTAKE

Pulls untreated air from all parts of the room continuously.

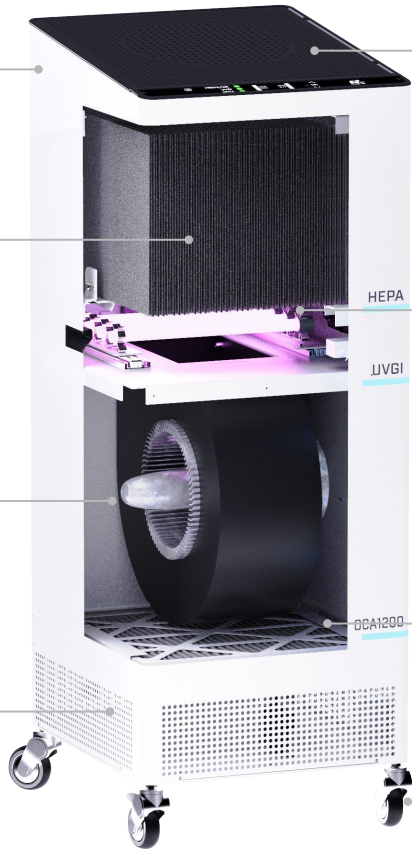

OPTIMIZED CIRCULATION

Angled vertical airflow promotes air circulation which prevents dead "pockets."

UVGI

Ultraviolet Germicidal Irradiation inactivates viruses and bacteria.

MERV-11 PREFILTER

Removes large particles like pollen, dirt, smoke, odors, and more.

ULTIMATE PORTABILITY

Medical-grade castors with integrated brakes are smooth, quiet & maintenance-free.

NO HASSLE MAINTENANCE

Indicates when to close doors or change filters and UV bulbs.

ACCURATE

Programmable room dimensions. Real time air changes / hour.



VERSATILE EXHAUST DESIGN

Integrated manifold. Negative pressure ready. 18° angled top discourages paper, keys, coffee placement.

ULTIMATE SAFETY

Control lock to prevent accidental setting change. UVC safety sensors. Lockable wheels.

FLEXIBLE & QUIET

Digital speed control.



Compare Omni CleanAir Professional Series Models

Portable Air Purification Designed for Everyday Workspaces

All Omni CleanAir models combine high-capacity airflow, UVGI and TRUE HEPA filtration. Models differ in CFM airflow only. Unlike consumer devices, our products are industrial specification and can be combined to accommodate all configurations of commercial buildings and workspaces.

MODEL	OCA500	OCA1200
RECOMMENDED FOR	Rooms up to 5000 FT³* (Classrooms, Restrooms, Offices, Exam Rooms, Small Conference Rooms)	Rooms up to 12,000 FT³* (Lobby, Open Cube Areas, Studios, Large Conference Rooms, Cafeterias)
AIRFLOW RATE	100 to 450 CFM (3 to 14 M ³ / min)	655 to 1200 CFM (17 to 34 M ³ / min)
SECONDARY FILTERS	Extended Surface, 45g Carbon Media	Extended Surface, 80g Carbon Media
Pre-filter MERV-11	●	●
Activated Carbon Filter (Gases, Chemicals, VOCs, Odor)	●	●
PRIMARY FILTER	12" Metal Frame, High Efficiency Glass Fiber. Tested to IEST-RP-CC001.3	12" Metal Frame, High Efficiency Glass Fiber. Tested to IEST-RP-CC001.3
TRUE HEPA 99.99% @ 0.3u	●	●
ULPA 99.999% @ 0.3u	○	○
UVGI SureUVCTM 64 W UVC @ 254nm	○	○
NOISE** Sound Suppressing Core in all chambers	45 db (@ 100 CFM) 55 db (@ 450 CFM)	57 db (@ 600 CFM) 59 db (@ 1200 CFM)
CONTROLS Filter Status, UVC Status, On/Off Power Indicator, Realtime CFM and ACH Indicators, Auto Shutoff, Safety Sensors, High Contrast OLED Digital Display, Controls Lock	●	●
NEGATIVE PRESSURE READY Integrated 10" Exhaust Manifold	○	○
POWER REQUIREMENTS	110 VAC / 60 Hz / 1.5A	110 VAC / 60 Hz / 7.1A
SIZE	14 x 14.5 x 33 in. (35.5 x 36.8 x 83.8 cm)	20 x 18 x 48 in. (51 x 46 x 122 cm)
WEIGHT	50 LBS (22.5kg)	110 LBS (50kg)

● Standard ○ Optional * Per Machine @ 6 Air Changes Per Hour ** @ 6ft (2m) NIOSH SLM